

Masonry Guard

Liquid Masonry Stabilizer and Sealer

Description

It is a liquid polymer modified masonry sealer with auxiliary agents to improve its deep penetration characteristics and sealing properties in existent porosities of concrete, sand lime bricks, cement mortars concrete blocks.

Uses

- MASONRY GUARD is used to protect driving rain and frost on the following substrates:-
- Concrete
- Natural stone
- Artificial Stone
- Clay brick
- Lime sand brick
- Cement sand render.

Application

Surfaces must be dry and free from oil and grease. Brush away loosely adhering material and dust before application. If lichen growth or mould is evident, surfaces may be treated with a suitable fungicidal wash followed by rinsing with water. Allow to dry before application of MASONRY GUARD.

Apply liberally by brush roller or spray (some foaming can occur). A second coat may be required on very porous and exceptionally dusty surfaces. This should be applied after the first coat has dried. Drying time is 2 to 4 hours per coat depending on temperature and humidity.

Coverage will vary considerably according to the method of use and the surface to which it is applied. The coverage is approximately 3 to 6m² per kg.

Packaging

5,20 and 200 kg containers.

Precautions


Cleaning: All equipment must be cleaned with water immediately after use. This product must not be emptied into drainage systems.

Storage: MASONRY GUARD has a shelf life of 12 months when kept in a dry store at moderate temperature ABOVE 5°C. The product must be protected from frost.

Fire Resistance: The product is not flammable.

Health and Safety

The product is non toxic but care should be taken to avoid splashes in the eyes and inhaling the vapours. Avoid prolonged contact with the skin. It is harmful if taken internally. Splashes to the skin or eyes should be removed with clean water. In the event of prolonged irritation, seek medical advice.

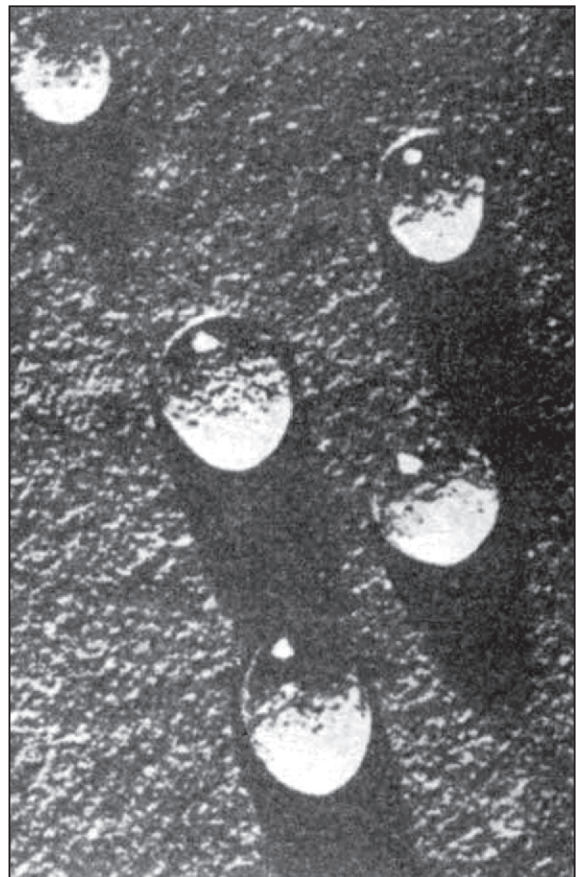

**Delta Coatings
& Sealants**